

**OPTIONS**  
From 16 to 700 kVA

- |   |   |  |   |
|---|---|--|---|
| ■ Containment and great autonomy tank                 | ⊕ | ■ Heat hand protection                         | ⊕ |
| ■ Central lifting arch                                | ⊕ | ■ 3 way fuel valve                             | ⊕ |
| ■ Inlet air pre-heating                               | ⊕ | ■ Electronic governor with speed adjustment    | ⊕ |
| ■ Connection terminal block "rental type"             | ⊕ | ■ Replaceable cartridge heavy duty air filter  | ⊕ |
| ■ Water separator fuel prefilter                      | ⊕ | ■ Automatic start pack                         | ⊕ |
| ■ Voltage adjustment                                  | ⊕ | ■ Customer color                               | ⊕ |
| ■ Earthing rod fixed differential                     | ⊕ | ■ Road trailer                                 | ⊕ |
| ■ Adjustable differential protection and earthing rod | ⊕ | ■ Shut-off valve and spark arrester            | ⊕ |
| ■ Battery cut-out                                     | ⊕ | ■ Reinforced impregnation                      | ⊕ |
| ■ Lub oil drain pump                                  | ⊕ | ■ French, EU, UK sockets                       | ⊕ |
| ■ Telys control board                                 | ⊕ | ■ Dual frequency                               | ⊕ |
| ■ TT neutral connection EDF France                    | ⊕ | ■ Galvanized under frame with forklift pockets | ⊕ |

↓

## Containment and great autonomy tank




Containment and great autonomy tank.

## Central lifting arch




Eye provided to assist with lifting via a central lifting point.

## Inlet air pre-heating

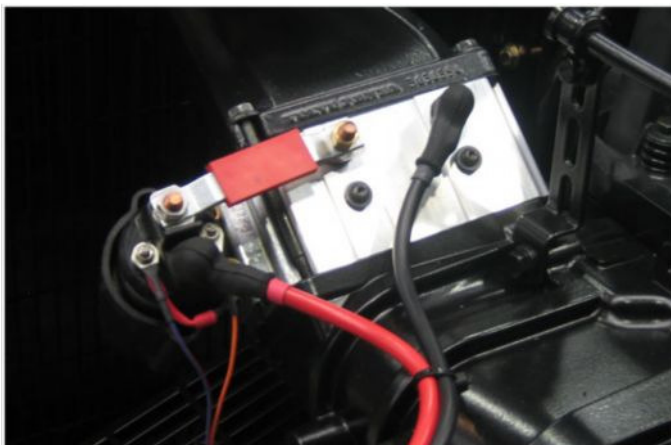

To start the generator by low temperature conditions.

## Connection terminal block "rental type"

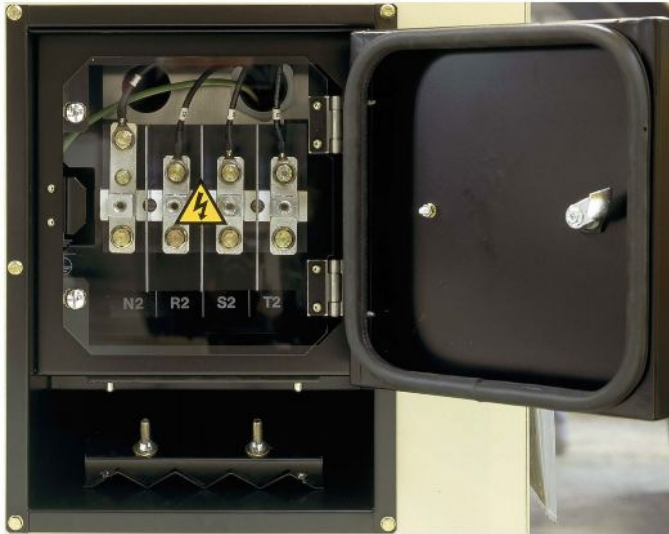

Large connecting terminal block designed for a rental application.

## Water separator fuel prefilter



Refers to decanting prefilter for diesel oil positioned between the tank and engine.

## Voltage adjustment




Refers to one electronic card with analogical output enabling to make the alternator voltage vary in a proportion of  $\pm 5\%$ .

## Earthing rod fixed differential with spike




The operators are protected from direct contact by a look-out unit with a fixed threshold.

**Adjustable differential protection and earthing rod** 

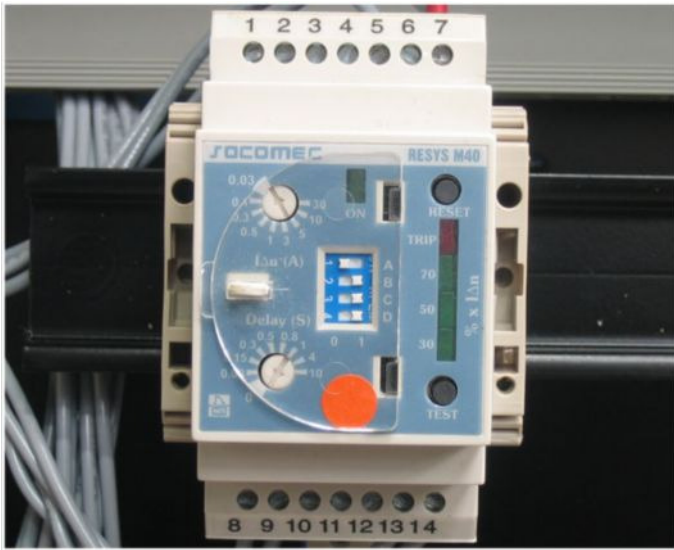


Refers to workers protection against direct contacts with differential relay adjustable in time and threshold, this corresponds to neutral TT. In this case a three-phases circuit-breaker is necessary.

**Battery cut-out** 

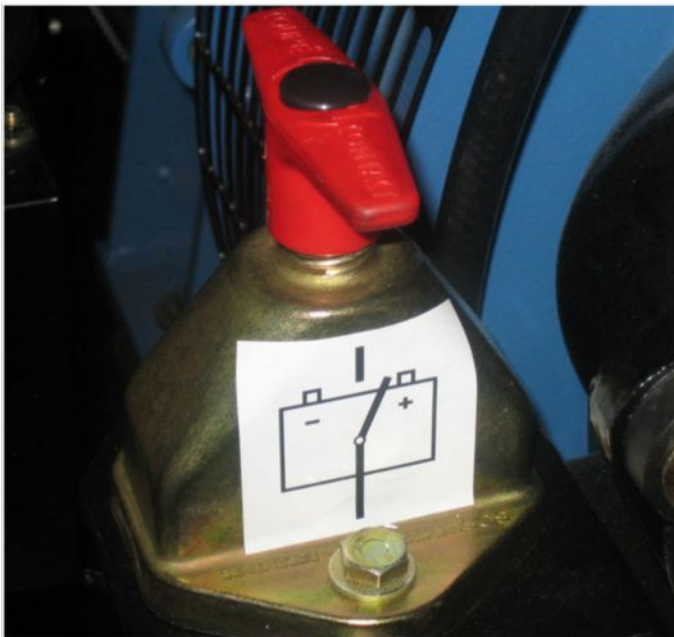

Refers to red switch battery cut-off control.

## Lub oil drain pump

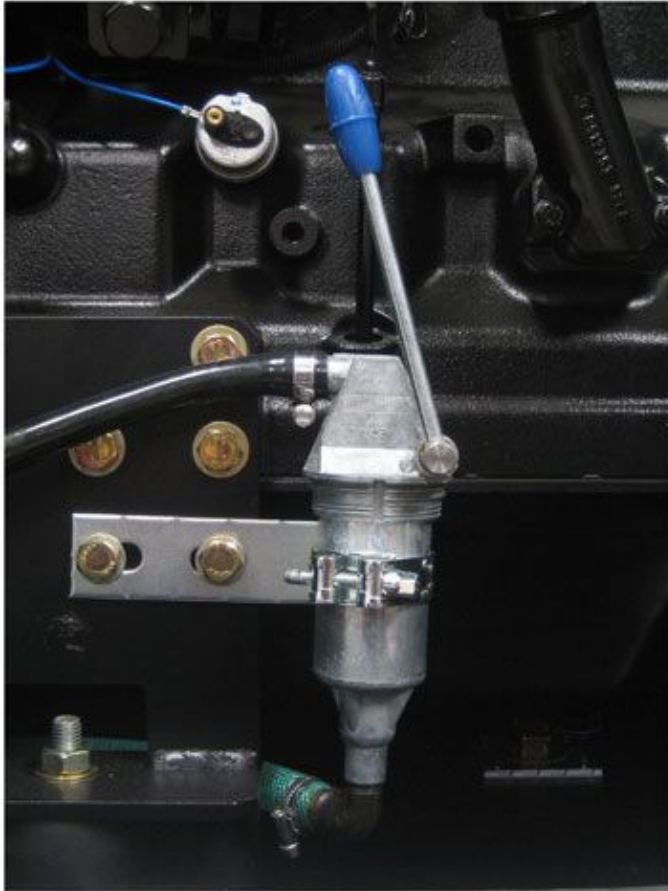


Refers to manual oil drainage pump for easier genset maintenance.

## Telys control board




Replacement of the manual Nexys panel with the manual Telys panel.

## Heat hand protection

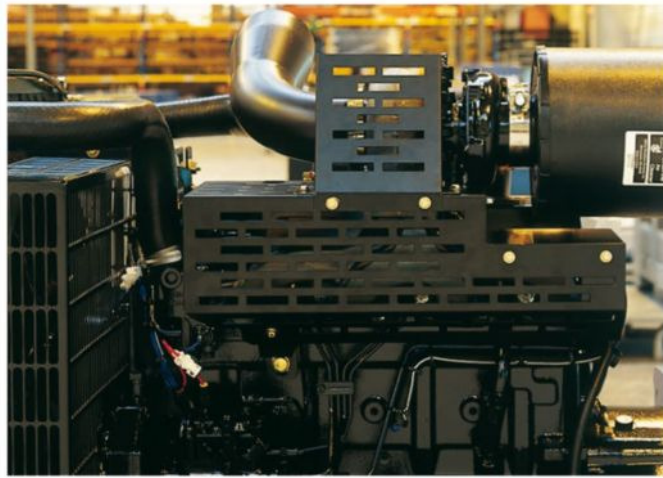

Refers to protective grid over hot sections (exhaust manifold) on diesel engine.

## 3 way fuel valve

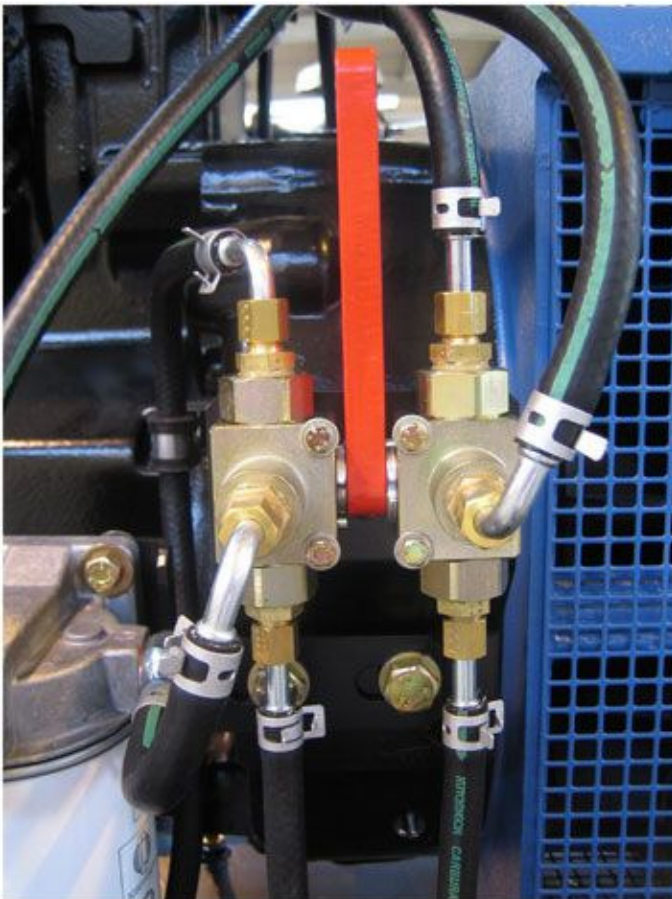

Manual valve enabling an exterior fuel supply source to be selected.

## Electronic governor with speed adjustment



Electronic type of speed governor with control box enabling precision of speed regulation and hence frequency at +/- 1%.

This regulator is included as standard on some engines.

## Replaceable cartridge heavy duty air filter



Refers to dry air filters with removable and interchangeable cartridge for dusty atmospheres possible to remove and clean by blowing through. These filters are used particularly when equipment required for rental.

## Shut-off valve and spark arrester



Safety device enabling the genset to operate in an explosive atmosphere.

## French, EU, UK sockets type



Refers to socket board set in the canopy with protective circuit breakers.

## Other options



<b>TT neutral connection EDF France</b>	Enables the alternator to be configured according to the EDF neutral system.
<b>Automatic start pack</b>	Refers to one 24 V regulated charger enabling to keep the battery operating . Its loading intensity is of 1A. Refers to the engine water pre-heating. This option also includes the control of the ATS.
<b>Customer color</b>	Refers to replacement of the standard white.
<b>Road trailer</b>	-
<b>Reinforced impregnation</b>	Refers to dual impregnation treatment of alternator windings (tropicalisation). Intended for use in high humidity (H<80%).
<b>Dual frequency</b>	Change the frequency by changing the generator speed.
<b>Galvanized under frame with forklift pockets</b>	It's an added frame integrating forklift pockets.